

Short Communication

A mathematical model for simulating canal flows at Ubombo sugar

Msibi S.T.^{*}, Khoza B. and Simelane S.C.

Ubombo Sugar Limited, P.O. Box 23, Big Bend, Swaziland
trevor.msibi@usq.edu.au

Available online at: www.isca.in, www.isca.me

Received 30th June 2017, revised 14th September 2017, accepted 25th September 2017

Abstract

An empirical model is presented for estimating discharge on the Ubombo Sugar Limited (USL) main gravity canal to augment bulk water management and water use efficiency. It uses stage readings obtained from measuring flumes A, B, C, and UPS to simulate discharge. The rationale for the development of the mathematical flow simulation model is the significance of the UPS flume as it measures readings that influence the daily operations of the farm, and the experiences with the ultrasonic flow meter installed in the flume. The model also provides a first for the simulation of accurate flow rates for flumes A, B, and C. A spreadsheet program that enables express prediction of canal flow rates was developed to influence timely implementation of these water management decisions. Calibrations demonstrated that the model is capable of predicting discharge at high accuracy ($p > 95\%$), and can be reliably used as a decision support tool for bulk water management. It can also be expanded to include other water measuring structures along Canal 1 and Canal 2, as well as the development of a stand-alone water management application for desktop and mobile computers. Although the model is appropriate for on-farm water management, it was developed for a specific canal and has not been tested for transferability.

Keywords: Water, Simulation, Model, Discharge, USL.

Introduction

Flow measurement is a very important practice in irrigated agriculture. It allows for appropriate and equitable distribution of water among users to enable efficient field application to meet crop demand. Information concerning the volume of available water is also key in planning for its future use. Consequently, increasing the utilisation and value of water makes the understanding of water measurement important and necessary. The most universally accepted and fundamentally sound equation for estimating discharge in open channels such as canals is the Manning's equation, which is based on the application of the full hydrodynamic principles of the equation of continuity. Equations governing the flow from discharge measurement structures such as weirs and flumes are also applied. However, in recent years, models which employ these fundamental principles have been developed for studying canal hydraulics to improve agricultural water management. These include models for automatic regulation of irrigation systems in real time to increase water use efficiency. For instance, a flow simulation model which provided new opportunities for understanding canal operations for manually operated irrigation systems was developed in Sri Lanka¹. Gillies and Smith² also developed and validated a surface irrigation simulation model (SISCO) for predicting the impact of flow rate and infiltration variability in furrow irrigation performance. Advances in technology have also introduced the use of sophisticated and more reliable flow measurement techniques, which are also applicable to open channels.

These include electromagnetic and/or ultrasonic devices coupled with other auxiliary equipment which are mounted on the discharge measurement structures for real time flow measurement and control.

At USL, a 12, 000 ha sugarcane growing and manufacturing enterprise, water is supplied through a 39 km main gravity earth canal system which takes off from the Great Usutu River. Inflow is measured daily at UPS flume which is equipped with an electromagnetic ultrasonic My City flow meter to give a numerical representation of incoming flow on a continuous basis. The flume is self-cleansing and rectangular in geometry, with level sensors mounted on one side of its structure to measure discharge. Flow readings are logged and transmitted via a GSM/GPRS network into an office computer at user-defined specifications. The flume is also equipped with a flow calibrated gauge for stage measurement. Information obtained from this meter is crucial in determining the volumes of water supplied to the factory, potable water treatment plants, irrigation, and storage. However, unprecedented circumstances such as power outage, device pack-up, repairs, and maintenance to some extent, makes it impossible to take these important readings. While manual measurement techniques are an option, it is always difficult to obtain accurate readings due to measurement errors such as single point velocity, and the time required to complete a sensible set of measurements that can estimate discharge more accurately. As a result, this affects the management of the water resource and farm operating decisions to the extent of water wastage, spillage, and/or inadequate

supplies, which can have impacts on manufacturing processes as well as sugarcane yields. The aim of this work was to develop a simple mathematical model for simulating discharge using stage readings for USL main gravity canal to enable precise and timely implementation of water management decisions. This model will serve as a decision support tool for improving water use efficiency in the farm.

Physical context of USL and the main gravity canal: USL is situated in Big Bend in the south-eastern part of Swaziland at latitude 26°45' and longitude 32°52'. The corporate enterprise grows sugarcane at a scale of 12,000 ha and manufactures this into raw and refined sugar. It also generates electricity from sugarcane biomass for its own operations, with a surplus being sold to the national grid. Mean annual rainfall is 600 mm and normally occurs between October and March, with temperatures averaging at about 21°C although peak summer temperatures can be as high as 40°C. Such climatic conditions only meet approximately 50% of sugarcane water requirements while the balance of the crop demand is supplied through irrigation by river abstraction. The USL main gravity earth canal is the main infrastructure used to convey water from the Great Usutu River into the farm. Irrigation systems comprises 116 centre pivot machines covering about 48% of total planted area, with semi-solid sprinkler, sub-surface drip, and furrow irrigating the remaining area. Distribution of water supply within the farm is adequately achieved by pumping through 71 pump stations with a total of 239 pumps.

The gravity main canal is a multi-user system with its operation and management undertaken by Big Bend Canal Services, which is a consortium representing three water users, i.e. Crookes Limited (including Bar J), Hladeni, and USL³. The

latter is the furthest downstream and the largest user. The canal also conveys water for the USL hydro power generation plant, which produces about 1.2 Megawatts of electricity. Flow measurement is achieved by means of flume structures (Flumes A, B, C, and UPS), which are strategically and respectively positioned to regulate flows along the water users. It then branches into two primary canals (Canal 1 and Canal 2) which tactically command the different farm areas. Two major Dams, Van Eck (10.4 x 106 m³) and Sivunga (6.9 x 106 m³), together with a number of night storages are used to balance water supply. Table-1 summarizes discharge capacities along the different canal sections in line with demand. The river intake weir has a maximum design capacity of 18 m³/s if river flow is not limiting. This capacity is up to scour gates 1 and 2 after which the canal reduces to 15 m³/s up to scour gates 3 and 4. The difference in flow capacity between the intake weir and the scour gates is the flow meant for scouring the canal under normal operating conditions. This scouring flow goes back to the river. From scour gates 3 and 4 up to the hydro, the canal capacity declines to 13 m³/s. After the hydro, the canal reduces to a further 8 m³/s all the way to Big Bend section dam off take, after which it then reduces to 6 m³/s up to Flume 6. From flume 6, the canal capacity reduces to 5.5 m³/s up to the main siphons just before UPS. During periods of low river flow, the abstraction rate at the intake is reduced below design capacity to maintain flow for other downstream users. In addition, a minimum environmental flow of 1.7 m³/s is always maintained downstream as measured at the river gauging station (GS16) downstream of Portzight farms. Additional flow into the canal is lifted through River Pump Station with two bulk water pumps delivering a combined discharge of 0.8 m³/s immediately downstream of the UPS flume as illustrated in Figure-1.

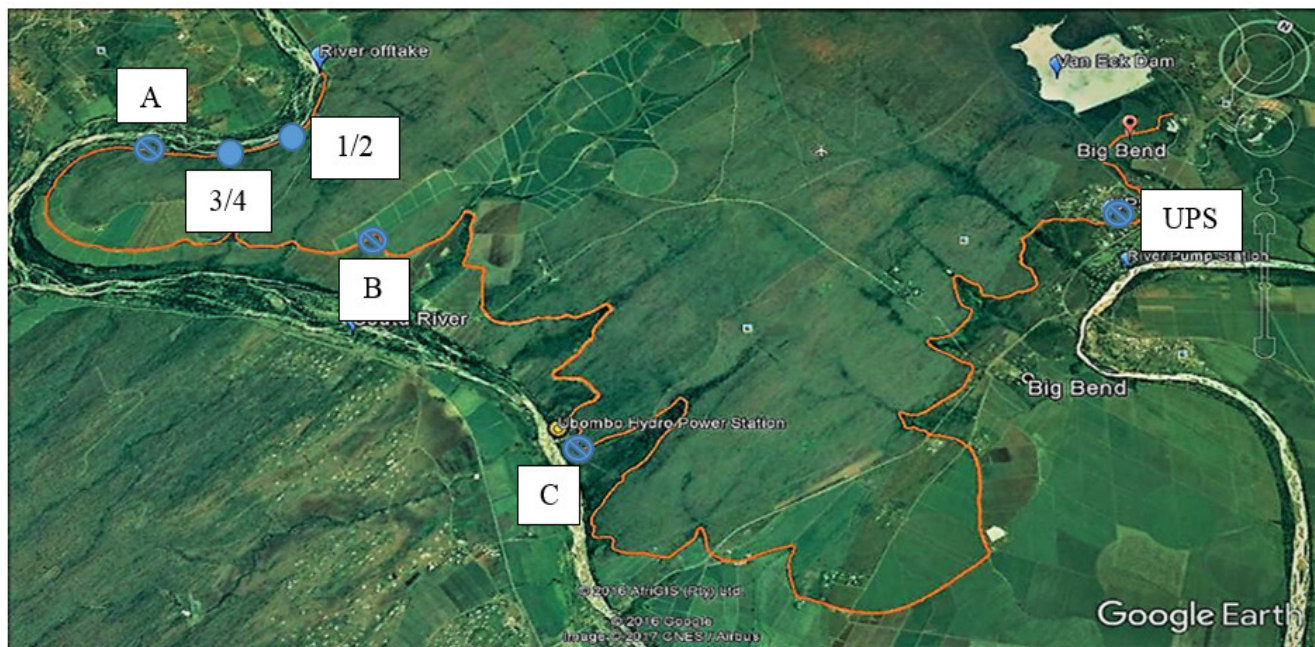


Figure-1: Layout of the USL main gravity earth canal and its physical attributes, ● = scour gates, ◻ = flumes.

Table-1: Summary of USL main gravity canal capacity and flow requirements.

Chainage	Peak Irrigation Requirement (m ³ /s)	Hydro Power Requirement (m ³ /s)	Total Peak Requirement (m ³ /s)	Canal Capacity (m ³ /s)
Intake weir - scour ½	9.7	3.1	12.8	18.0
Scour ½ - 3/4	9.7	3.1	12.8	15.0
Scour 3/4 - Hydro	9.7	3.1	12.8	13.0
Hydro – BBS Dam off take	8.8	0.0	8.8	8.0
BBS Dam offtake – Flumes 6	7.0	0.0	7.0	6.0
Flume 6 – Siphon inlet	7.0	0.0	7.0	5.5
Siphons – UPS and Van Eck Dam	7.0	0.0	7.0	5.5

Materials and methods

Field measurements on flume dimensions (width and depth) were taken using a tape measure and prefabricated steel rod with a thin flat plate at the bottom (Table-2). Design drawings for the UPS flume were used to verify these parameters. An Aqua-probe battery powered current meter equipped with an impeller, sensor, and a digital transmitter was used to measure flow velocity. The velocity measurements were determined by using point velocity readings taken at three different depths, i.e. near the water surface, 0.4 and 0.6 of the depth of each flume, and at 1.0 m intervals across the flumes width⁴. Stage readings were also recorded using the gauges installed on the flumes and were validated with measurements taken with the calibrated probe of the current meter. The ultrasonic My City flow readings were also taken in the process for the UPS flume to enable the standardization of manually computed flows. These measurements were taken every morning for a period of 102 days consecutive, to capture flow variations in the canal. Measurements were conducted in the morning and every afternoon for the UPS flume to generate a large set of readings. This enabled taking flow readings between near zero flow and when the canal was flowing at full capacity.

Table-2: Flume dimensions along USL main gravity canal.

Measuring Flume	Width (m)	Maximum Depth (m)
Flume A	11.41	1.62
Flume B	10.98	1.30
Flume C	5.89	1.25
UPS	6.96	1.20

Results and discussion

The daily water data, which included point velocity readings measured at the respective depths, and stage (flow depth), was

analysed by calculating average velocity, and using the continuity equation (Equation-1) for each flume cross-sectional area, since discharge is based on the concept that volumetric flow rate is a product of flow velocity and cross-sectional area⁵⁻⁷. It is known that flumes increase flow velocity and thereby changing the flow from subcritical to supercritical conditions, due to acceleration induced by changes in flow depth or converging side walls along the flume structure⁸⁻¹⁰. However, the flow conditions in these flumes warranted the application of the continuity equation since the flumes had continuous rectangular geometric shapes and uniform slopes (constant depths), with no obstructions along the bed such as sharp-edged structures which could necessitate the use of weir equations. The manual computations were correlated with the ultrasonic meter readings for the UPS flume. These discharge readings were then plotted to establish rating curves representing stage versus discharge and were fitted on a logarithmic model with a coefficient of determination (CV) greater than 97%. The logarithmic models are presented in Equations 2, 3, 4, and 5 respectively.

$$Q = VA \tag{1}$$

Where: Q = discharge (m³/s), V = average flow velocity (m/s), and A = cross-sectional area (m²).

$$Y_A = 0.602 \ln(x) - 0.217 \tag{2}$$

$$Y_B = 0.585 \ln(x) - 0.381 \tag{3}$$

$$Y_C = 0.42 \ln(x) + 0.204 \tag{4}$$

$$Y_{UPS} = 0.519 \ln(x) + 0.23 \tag{5}$$

Empirical equations were then derived by integration using the above models for each flume. Equation-6 illustrates an empirically derived model for predicting discharge using stage at the UPS flume, where, Q = canal flow rate in litres per second (l/s), e = constant equal to 2.718281828, and h₀ = stage in metres (m). For discharge rates in metric units (m³/s), equation 7

is proposed, where m represent the exponent for each measuring flume. Expressions for specific exponent values corresponding to flumes A, B, C, and UPS are derived as shown in Equations 8, 9, 10, and 11 and are denoted by m_A , m_B , and m_C , m_{UPS} .

$$Q = 1000 e^{\left[\frac{h_0 - 0.23}{0.52} \right]} \quad (6)$$

$$Q = e^m \quad (7)$$

$$m_A = \frac{h_0 + 0.23}{0.6} \quad (8)$$

$$m_B = \frac{h_0 + 0.38}{0.59} \quad (9)$$

$$m_C = \frac{h_0 - 0.2}{0.42} \quad (10)$$

$$m_{UPS} = \frac{h_0 - 0.23}{0.52} \quad (11)$$

A spreadsheet-based interface integrating the empirical equations for the four measuring flumes was developed to enable an interactive and express digital simulation of discharge rates along the canal using stage readings (Figure-2). The program has the advantage of being able to accurately predict flows from a single measurement obtained from the flumes without the need of additional equipment other than the gauges installed on the flumes. This is particularly important for situations where the UPS ultrasonic flow meter is unable to

measure flow rates, and the need for intense measurements when using manual techniques. The model also provides a first for precise discharge rates prediction for flumes A, B, and C, where flows were historically estimated using monographs developed during canal construction, although canal upgrades to increase flow capacities and general maintenance have modified the hydraulics of the canal. A Water Bailiff is able to take stage readings and quickly run the model to establish the canal flow rates and then produces a daily water report. The model can also be programmed and packaged into a stand-alone application that can operate on Windows environment using high level programming software codes.

Model Calibration: The My City ultrasonic flow meter at UPS flume was used to calibrate the model. The meter is usually calibrated and certified for fitness and accuracy on an annual basis, and measures flow to a relative degree of accuracy of up to 2% at full scale. Simulated flows using stage in the model were correlated with readings obtained from the flow meter at a given time period. This was meant to avoid comparing model outputs with flow meter readings of a different time-step due to flow variations in the canal. The model simulated flows with an accuracy of 99% when compared to the ultrasonic meter, which shows that it can be reliably used to predict discharge when the flow meter is out of order. Additional measurements were also taken for flumes A, B, and C to compute discharge and compared with simulated stage-discharge results. Results demonstrated that the model has the capacity to predict flows at an average accuracy of 95% for the three flumes.

USL Canal Discharge			06-Jun-17		
Measuring Station	h_0 (m)	e	m	Discharge (m ³ /s)	Discharge (l/s)
Flume A	1.45	2.718281828	2.771276596	16.0	15,979
Flume B	1.12	2.718281828	2.565492476	13.0	13,007
Flume C	1.10	2.718281828	2.135573028	8.5	8,462
UPS	1.00	2.718281828	1.484772552	4.4	4,414
H_0 = stage reading across measuring flume					

Figure-2: A spreadsheet program for simulating canal discharge using stage readings at USL.

Conclusion

The measurement of flow readings along the USL main gravity canal has been challenging for a number of reasons, and hence obscuring on-farm water management. A mathematical model capable of predicting discharge rates for the canal has been developed to enhance bulk water management decision-making and water use efficiency. The model uses empirical equations derived from flow readings obtained from the gravity canal, and is able to predict flows with high level precision. It also provides a first to simulate accurate flows on the upstream sections of the canal as measured by flumes A, B, and C respectively. Additionally, the model can be expanded to include all flow measuring structures along Canal 1 and Canal 2, and can be programmed into a software suitable for desktop and mobile computers using high level programming languages. This work outlines the significance and application of engineering principles in providing water management solutions at farm scale.

Acknowledgements

The authors are grateful to USL for providing an opportunity and resources to undertake this project.

References

1. Sally H. and Rey J. (1992). Application of mathematical models for simulation of canal operations at Kirindi Oya, Sri Lanka: preliminary results. *Advancements in IIMI's Research 1989-91: A Selection of Papers Presented at Internal Program Reviews*, 177.
2. Gillies M.H. and Smith R.J. (2015). SISCO: surface irrigation simulation, calibration and optimisation. *Irrigation Science*, 33(5), 339-355.
3. Msibi S.T., Kihupi N.I. and Tarimo A.K.P.R. (2014). An appraisal of water and power budgeting systems for sustainable irrigation at Ubombo. *Research Journal of Engineering Sciences*, 3(4), 1-9. ISSN 2278 - 9472.
4. Chen Y.C., Kuo J.J., Yu S.R., Liao Y.J. and Yang H.C. (2014). Discharge estimation in a lined canal using information entropy. *Entropy*, 16(3), 1728-1742.
5. Montes Sergio (1998). *Hydraulics of Open Channel Flow*. American Society of Civil Engineers, USA. ISBN: 0784403570.
6. Chanson Hubert (2004). *Hydraulics of Open Channel Flow*. www.sciencedirect.com/ science/book/ 9780750659789. Accessed on 29/06/2017.
7. Waller Peter and Yitayew Muluneh (2015). *Irrigation and Drainage Engineering*. Springer, ISBN 978-3-319-05698-2.
8. Walski T.M., Chase D.V. and Savic D.A. (2001). *Water Distribution Modeling*. Haestad Methods Inc. USA. ISBN: 9780965758048. 480.
9. Tullis J.P. (1989). *Hydraulics of pipelines: Pumps, valves, cavitation, transients*. John Wiley & Sons, Inc, 288. ISBN: 978-0-471-83285-0.
10. Lozano D. and Mateos L. (2009). Field evaluation of ultrasonic flowmeters for measuring water discharge in irrigation canals. *Irrigation and Drainage*, 58(2), 189-198.